
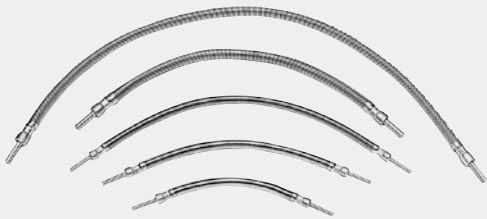


Flexible hose (For low pressure)

Dimensional drawing

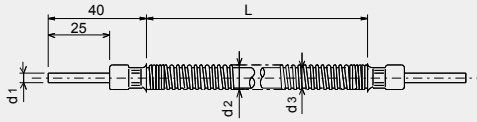

How to order

FH -

Tubing diameter	
4	φ4
6	φ6

Length L (mm)

175~250	25mm Unit
250~1000	50mm Unit
1000~2000	100mm Unit
2000~5000	500mm Unit

Specifications

Outer diameter (φ)	4	6
Working pressure (MPa)	3	4
Working temperature range	-20°C - +90°C	
Minimum bending radius (R)	40	120
d1(φ)	4	6
d2(φ)	8	10
d3(φ)	10	13.5

Directions for use

- Please make some allowance for length, bending radius and working pressure.
- Please make sure that tubing is not twisted.
- Please do not bend the tubing at close point to the connectors.

